


IMUSUODATTIMET SUCTION FILTERS

Dimensions:

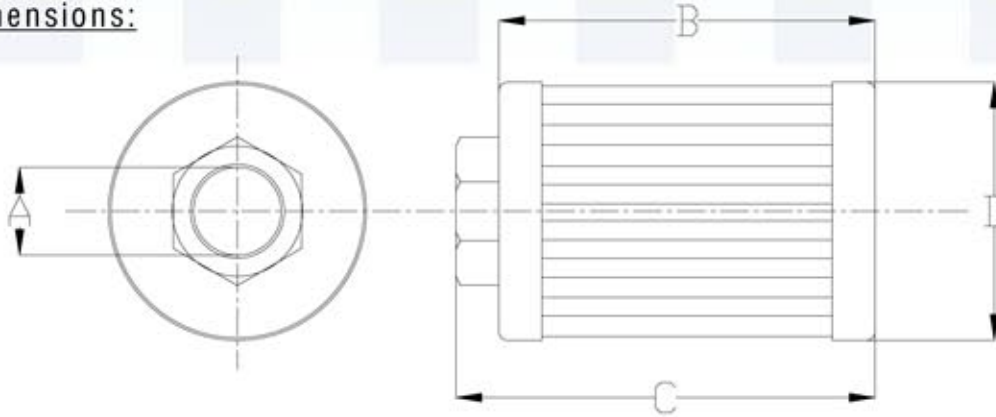

MODEL NO.	FLOW LPM	THREAD IN. BSP A	LENGTH B	OVERALL LENGTH C	DIA D	SCREEN AREA (SQ. CMS.)
IU-6430	12	3/8"	78	90	46	190
IU-6431	20	1/2"	93	105	46	258
ISE-201	28	3/4"	97	109	64	105
ISE-202	40	1"	127	139	64	545
ISE-304	60	1 1/4"	127	139	84	930
ISE-301	80	1 1/2"	156	168	84	1170
IU-6432	120	1 1/2"	188	200	84	1450
IU-6433	160	2"	223	235	100	1935
IU-2315	200	2"	248	260	100	2195
ISE-402	300	2 1/2"	199	211	130	2790
ISE-403	400	3"	260	272	130	3700
ISE-404	600	3"	333	345	130	5900

P.N : Materials and Dimensions are subject to change without notice.
Dimensions in mm otherwise stated.

TECHNICAL DATA

END CAP : Galvanized steel
 CENTER TUBE : Galvanized steel
 HEAD : DIE CAST AL
 TEMP. RANGE : -25 to +110 °C
 WIRE MESH : 125 MC st. steel